



eDELIVER
100% ELECTRIC VEHICLE



MAXUS eDELIVER Range

FEATURING MAXUS INTELLIGENCE ONBOARD





MAXUS

eDELIVER 3
100% ELECTRIC VEHICLE

MAXUS eDELIVER 3 VARIANTS

Specifications

MAXUS eDELIVER 3	SWB Panel Van 50kWh	LWB Chassis Cab 50kwh
DIMENSIONS & CAPACITIES		
Number of seats	2	2
Sliding door	Single	NA
Overall length (mm)	4555	5090
Overall width (mm)	1780	1780
Overall height (mm)	1900	1885
Wheel base (mm)	2910	3285
Cargo volume (m³)	4.8	NA
Loadspace length (mm)	2180	NA
Loadspace width (mm)	1665	NA
Loadspace height (mm)	1330	NA
Max loadspace width between wheel arches(mm)	1220	NA
Slide door width (mm)	710	NA
Slide door height (mm)	1270	NA
Ground clearance (mm)	144	140
Maximum permissible length (mm)	NA	5156
Maximum permissible width (mm)	NA	1810
Maximum permissible height (mm)	NA	2370
WEIGHTS & PAYLOAD		
GVW(kg)	2660	2920
CVW(kg)	1615	1515
Payload: GVW-CVW(kg)	1045	1405
Max axle load: front/rear (kg)	1250/1460	1460/1460
GTM (kg)	2750	3100
Towing capacity (Braked/Unbraked) (kg)	1030/750	750/750
BATTERY & CHARGING		
Battery capacity (kWh)	50	50
Range WLTC combined (km/mi)*	227/141	190~240/118~149
Range WLTC city (km/mi)*	322/200	265~327
Energy consumption WLTC combined (kWh/100km)*	23.7	23~29
AC Charging time (5%~100%) (h)/Charging power (kW) Three-Phase	5.6h/11kw	5.6h/11KW
DC Charging time (5%~80%) (h)/Charging power (kw)	45min/57kw	45min/57kw
Battery thermal management: liquid cooling & liquid heating	S	S
11kw AC charger & EPTO (high voltage power take-off)**	S	S
Charging wire: Mode 2	S	S
Charging wire: Mode 3, Three-Phase	S	S
V2L exterior function without discharge cable	S	

MAXUS eDELIVER 3 VARIANTS

Specifications

MAXUS eDELIVER 3	SWB Panel Van 50kWh	LWB Chassis Cab 50kwh
POWER & DRIVING		
Driving wheel	FWD	FWD
Rated power/ Max power (kW)	50/118	50/118
Rated torque/ Max torque(N.m)	100/225	100/225
Max speed (kmh/mph)	120/75	90/56
Acceleration 0-100kmh/0-62mph (sec)	8.85	NA
Min turning diameter (m)	11.74	13.06±1
Tyre	185/65R15C	185/65R15C
EXTERIOR		
Halogen headlights	S	S
Halogen tail lights	S	NA
Front fog lights	S	S
Single sliding door	S	NA
15-inch steel wheel	S	S
15-inch alloy wheel	O	NA
Power heated exterior mirrors	S	O
Roof rack mounting points	S	NA
Removable front tow hook	S	S
Rear Double Opening Gate(Blind Window) with 180°hinges	S	NA
Manual Rear Lift Gate(Blind Window)	O	NA
Exterior colours-White	S	S
Special colours- Metal Black or Warm Argent	O	O
INTERIOR & COMFORT		
Leather Multi-functional Steering wheel	S	S
Shft Asm-Electronic Knob	S	S
Heated front seats	S	S
LED front reading light	S	NA
Power front windows (one click up & down)	S	S
LED cargo lights*****	S	NA
Automatic air conditioner	S	S
10.25" touch screen with MP5 & USB & Bluetooth & Carplay & Android Auto & DAB	S	S
2 speakers	S	S
DAB	S	S
2 smart keys	S	S

SAFETY & SECURITY

Tyre pressure monitoring system	S	S
2 airbags (front) for driver & front passenger	S	S
2 airbags (side) for driver & front passenger	O	O
ECall	S	S
Safety belt reminder	S	S
Rear view camera	S	S
Rear radar	S	S

DRIVER ASSISTANCE

ESP+EBA+HHC	S	S
EPP	S	S
AEBS (Automatic emergency braking system)	S	S
LDW (Lane departure warning) & LKA(lane keeping assist system)	S	S
SLIF (Speed Limit Information Function)	S	S
DMS (Driver monitor system)	S	S

*It is the weight of a standard-specification base vehicle (different series will have different kerb masses) without the driver (75 kg), crew or cargo.

**Based on full charge. Estimated range & energy consumption using Worldwide Harmonised Light Vehicle Test Procedure (WLTP). Actual range & energy consumption varies with conditions such as temperature, using of air conditioner, driving mode and behaviours, route profile, vehicle maintenance, and battery age and condition.

***Charge power can decrease with increasing state of charge. Actual charge times and charge speeds can vary based on different factors(e.g. temperature, vehicle maintenance, battery age and condition, used charging infrastructure).



MAXUS

eDELIVER 5

	L1H1 64kWh	L1H2 64kWh	L2H1 64kWh	L2H2 64kWh
DIMENSIONS & CAPACITIES				
Seating Layout: 3 Seats	S	S	S	S
Seating Layout: 2 Seats	O	O	O	O
Sliding Door	Double	Double	Double	Double
Overall Length (mm)	4800	4800	5250	5250
Overall Width (mm)	1874	1874	1874	1874
Overall Height (mm)	1960	2180	1960	2180
Wheel Base (mm)	3100	3100	3100	3100
Cargo Volume (m ³)	6.6	7.6	7.7	8.9
Loadspace Length (mm)	2654	2654	3042	3042
Loadspace Width (mm)	1704	1704	1704	1704
Loadspace Height (mm)	1455	1675	1455	1675
Max Loadspace Width Between Wheel Arches(mm)	1250	1250	1250	1250
Slide Door Width(mm)	873	873	873	873
Slide Door Height(mm)	1243	1243	1243	1243
Ground Clearance Of The Front Axle (mm)	159	159	148	148
Ground Clearance Of The Rear Axle (mm)	148	148	142	142
Ground Clearance Between Axles (mm)	146	146	145	145



MAXUS eDELIVER 5 Panel Van 64kWh

	L1H1	L1H2	L2H1	L2H2
	64kWh	64kWh	64kWh	64kWh
WEIGHTS & PAYLOAD				
GVW(kg)	3050	3050	3150	3150
CVW(kg)	1850	1850	1930	1930
Payload: GVW-CVW(kg)	1200	1200	1220(2S)/1265(3S)	1220(2S)/1265(3S)
GVW Axle Load: Front/Rear(kg)	1250(2S)/1800(2S)	1250(2S)/1800(2S)	1297(2S)/1853(2S)	1297(2S)/1853(2S)
	1287(3S)/1763(3S)	1287(3S)/1763(3S)	1343(3S)/1852(3S)	1343(3S)/1852(3S)
Max Axle Load: Front/Rear(kg)	1290/1800	1290/1800	1450/1800	1450/1800
GTM (kg)	4550	4550	4650(2S)/4695(3S)	4650(2S)/4695(3S)
Towing Capacity (Braked/Unbraked) (kg)	1500/750	1500/750	1500/750	1500/750

Notes: ● Standard ○ Optional / Unavailable



MAXUS eDELIVER 5 Panel Van 64kWh

	L1H1 64kWh	L1H2 64kWh	L2H1 64kWh	L2H2 64kWh
BATTERY & CHARGING				
Battery Capacity(kWh)	64	64	64	64
Range WLTC Combined (km)*	335	305	321	301
Range WLTC City (km)*	489	467	454	436
Energy Consumption WLTC Combined (kWh/100km)*	21 kWh/100 km	23.1kWh/100km	22.5kWh/100km	23.9kWh/100km
AC Charging Time (20%~80%) (h)/Charging Power (kW) Three-Phase	4h/11kW(S)	4h/11kW(S)	4h/11kW(S)	4h/11kW(S)
DC Charging Time (20%~80%) (h)/Charging Power (kW)	36min/70kW (S)	36min/70kW (S)	36min/70kW (S)	36min/70kW (S)
Battery Thermal Management: liquid Cooling & Liquid Heating	S	S	S	S
AC Charging Cable	S	S	S	S
V2L(Through Charging Port, W/O Discharging Gun)	O	O	O	O

*Estimated range & energy consumption under EU WLTC test standard. Actual range & energy consumption varies with conditions such as temperature, operation of air conditioner, driving mode, route conditions, battery capacity loss and loading mass.



MAXUS eDELIVER 5 Panel Van 64kWh

	L1H1 64kWh	L1H2 64kWh	L2H1 64kWh	L2H2 64kWh
POWER & DRIVING & STEERING				
Driving Wheel	FWD	FWD	FWD	FWD
EPS(Electric Power Steering)	S	S	S	S
Max Power (kW)	120	120	120	120
Max Torque(N.m)	240	240	240	240
Max Sspeed(km/h)	120	120	120	120
Acceleration 0-50km/h (sec)	4.9	4.9	5.1	5.1
Acceleration 0-100km/h (sec)	10.7	10.7	10.9	10.9
Min Turning Diameter(m)	11.5	11.5	12.8	12.8
Approach Angle/Departure Angle (CVW) (°)	25.5/20.8	25.1/20.8	25.0/19.6	24.8/19.6
Tyre & Spare Tyre	195/65 R16C	195/65 R16C	195/65 R16C	195/65 R16C



MAXUS eDELIVER 5 Panel Van 64kWh

	L1H1 64kWh	L1H2 64kWh	L2H1 64kWh	L2H2 64kWh
EXTERIOR				
LED Headlights	S	S	S	S
Halogen Tail Lights	S	S	S	S
Front & Rear Fog Lights	—, Rear fog light	—, Rear fog light	—, Rear fog light	—, Rear fog light
Single Sliding Door	—	—	—	—
Dual Sliding Door	S	S	S	S
Rear Wing Doors With 180° Hinges	S	S	S	S
Alloy Wheel 6.5Jx16	S	S	S	S
Power Heated Exterior Mirrors	S	S	S	S
Power Side Step***	—	—	—	—
Removable Front Tow Hook	S	S	S	S
Exterior Paint: Warm White	S	S	S	S
Exterior Paint: Cement Ash	O	O	O	O
Exterior Paint: Metal Black (Metalic Paint)	O	O	O	O



MAXUS eDELIVER 5 Panel Van 64kWh

	L1H1 64kWh	L1H2 64kWh	L2H1 64kWh	L2H2 64kWh
INTERIOR & COMFORT				
PVC Multifunctional Steering Wheel	S	S	S	S
Manual Anti-Glare Interior Mirror	S	S	S	S
Column-Mounted Shifter	S	S	S	S
Heated Front Seats	S	S	S	S
LED Front Reading Light	S	S	S	S
Power Front Windows (One Click Up & Down)	S	S	S	S
Windshield Wiper	S	S	S	S
LED Cargo Lights	S	S	S	S
Manual Air Conditioning	S	S	S	S
12.3" Touch Screen With MP5 & USB & Bluetooth & Wirelss Carplay & Android Auto & DAB	S	S	S	S
12V Power Outlet (Under Cup Holder)	S	S	S	S
2 Speakers	S	S	S	S
Keyless Start (PEPS System)	S	S	S	S
2 Smart Keys	S	S	S	S
IOV (Internet Of Vehicle, Incl. Navigation/Remote Control)	O	O	O	O



MAXUS eDELIVER 5 Panel Van 64kWh

	L1H1 64kWh	L1H2 64kWh	L2H1 64kWh	L2H2 64kWh
SAFETY & SECURITY				
Tyre Pressure Monitoring System	S	S	S	S
ABS+EBD+ESC	S	S	S	S
Front And Side Airbags For Driver & Front Passengers	S	S	S	S
ECall	S	S	S	S
Safety Belt Reminder	S	S	S	S
360 Around-View System	S	S	S	S
Rear Parking Sensor	S	S	S	S
DRIVER ASSISTANCE				
FCW (Forward Collision Warning) & AEB (Automatic Emergency Braking)	S	S	S	S
ACC (Adaptive Cruise Control)	S	S	S	S
LDW (Lane Departure Warning)	S	S	S	S
LKA (Lane Keep Assist)	S	S	S	S
ELK (Emergency Lane Keeping)	S	S	S	S
SLIF (Speed Limit Information Function)	S	S	S	S
IHC (Intelligent High beam Control)	S	S	S	S
DSM (Driver State Monitoring)	S	S	S	S




eDELIVER7
100% ELECTRIC VEHICLE



 **MAXIS**

Basic Parameters

Weights		Dimensions	
GTW(kg)	4250	L*W*H(mm)	4998*2030*1990
GVW(kg)	3500	Wheel base(mm)	3000
CVW(kg)	2300	Ground Clearance(mm)	150
Maximum Front Axle Load(kg)	1830	Turning Radius(m)	6.05
Maximum Rear Axle Load(kg)	2050	Dimensions Cargo Area	
Payload(kg)	1200	Cargo Volume(m ³)	5.9
Maximum trailer capacity Braked(kg)	1500	Maximum Length(mm)	2547
Maximum trailer capacity Unbraked(kg)	750	Maximum Width(mm)	1800
		Maximum Width between wheelarches(mm)	1390
		Maximum Height(mm)	1328
		Dimensions Sliding Door	
		Width(mm)	990
		Height(mm)	1200

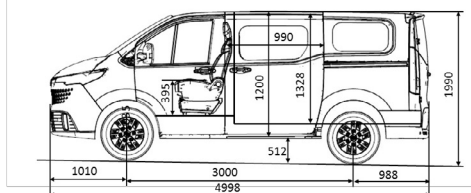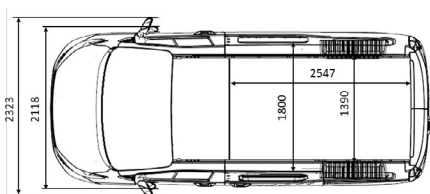






MAXUS eDELIVER 7 L1H1 77kWh

Basic Parameters

Battery & Electric Motor		Performance	
Battery Capacity(kWh)	77	Maximum Speed (kmh/mph)	90/55 (ECO) 120/75 (Normal, Power)
Max. Power(kW)	150	Acceleration 0-100kmh / 0-60mph	11.4/10.8
Max.Torque(N.m)	330	Max. Grade Ability	25%
Energy Consumption WLTP Combined (kWh/100km)	27.50	Suspension & Chassis	
Charging Time(AC charger 11kW, 5-100%)h	8h	Brake System	Front & Rear: Disc Brake
Charging Time (DC 20-80%) min (DC 90KW,150A)	43min	Suspension	Front: Macpherson Independent Suspension
Autonomy WLTP Combined (km/mi)	318/200	EPB	S
Autonomy WLTP Urban (km/mi)	485/300	Electronic Column Shift	S
Wheels and Tyres			
		Tyre Size	215/65R16C
		Wheel Tyre Steel	S
		Wheel Tyre Alloy	O
		Spare Wheel	Full Size (steel)

Basic Parameters

Weights		Dimensions	
GTW(kg)	4250	L*W*H(mm)	4998*2030*1990
GVW(kg)	3500	Wheel base(mm)	3000
CVW(kg)	2375	Ground Clearance(mm)	150
Maximum Front Axle Load(kg)	1830	Turning Radius(m)	6.05
Maximum Rear Axle Load(kg)	2050	Dimensions Cargo Area	
Payload(kg)	1125	Cargo Volume(m ³)	5.9
Maximum trailer capacity Braked(kg)	1500	Maximum Length(mm)	2547
Maximum trailer capacity Unbraked(kg)	750	Maximum Width(mm)	1800
		Maximum Width between wheelarches(mm)	1390
		Maximum Height(mm)	1328
		Dimensions Sliding Door	
		Width(mm)	990
		Height(mm)	1200

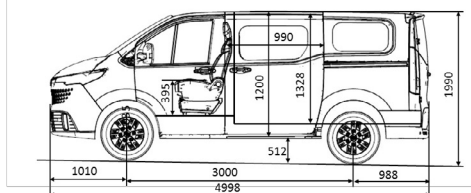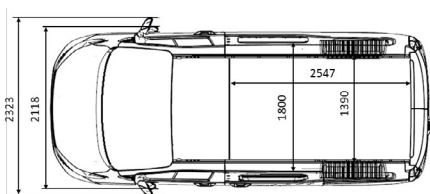







MAXUS eDELIVER 7 L1H1 88kWh

Basic Parameters

Battery & Electric Motor		Performance	
Battery Capacity(kWh)	88	Maximum Speed (km/h, Mi/h)	90/55 (ECO) 120/75 (Normal, Power)
Max. Power(kW)	150	Acceleration 0-100km/h / 0-60Mi/h	11.5/10.9
Max.Torque(N.m)	330	Max. Grade Ability	25%
Energy Consumption WLTP Combined (kWh/100km)	26.9	Suspension & Chassis	
Charging Time(AC charger 11kW, 5-100%)h	9.3h	Brake System	Front & Rear: Disc Brake
Charging Time (DC 20-80%) min (DC 90KW,150A)	43min	Suspension	Front: Macpherson Independent Suspension
Autonomy WLTP Combined (km/Mi)	370/230	EPB	S
Autonomy WLTP Urban (km/Mi)	542/340	Electronic Column Shift	S
Wheels and Tyres			
		Tyre Size	215/65R16C
		Wheel Tyre Steel	S
		Wheel Tyre Alloy	O
		Spare Wheel	Full Size (steel)

Basic Parameters

Weights		Dimensions	
GTW(kg)	4250	L*W*H(mm)	5364*2030*1990
GVW(kg)	3500	Wheel base(mm)	3366
CVW(kg)	2365	Ground Clearance(mm)	147
Maximum Front Axle Load(kg)	1830	Turning Radius(m)	6.7
Maximum Rear Axle Load(kg)	2050	Dimensions Cargo Area	
Payload(kg)	1135	Cargo Volume(m ³)	6.7
Maximum trailer capacity Braked(kg)	1500	Maximum Length(mm)	2913
Maximum trailer capacity Unbraked(kg)	750	Maximum Width(mm)	1800
		Maximum Width between wheelarches(mm)	1390
		Maximum Height(mm)	1328
		Dimensions Sliding Door	
		Width(mm)	990
		Height(mm)	1200


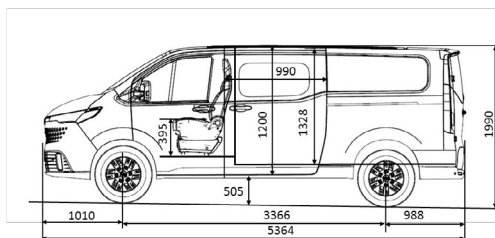

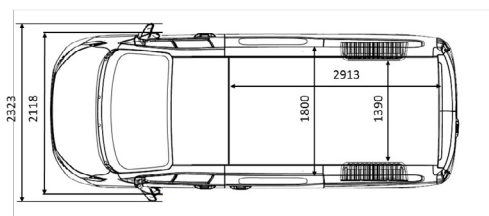


Basic Parameters

Battery & Electric Motor		Performance	
Battery Capacity(kWh)	77	Maximum Speed (km/h, Mi/h)	90/55 (ECO) 120/75 (Normal, Power)
Max. Power(kW)	150	Acceleration 0-100km/h / 0-60Mi/h	11.5/10.9
Max.Torque(N.m)	330	Max. Grade Ability	25%
Energy Consumption WLTP Combined (kWh/100km)	27.80	Suspension & Chassis	
Charging Time(AC charger 11kW, 5-100%)h	8h	Brake System	Front & Rear: Disc Brake
Charging Time (DC 20-80%) min (DC 90KW,150A)	43min	Suspension	Front: Macpherson Independent Suspension
Autonomy WLTP Combined (km/Mi)	310/190	EPB	S
Autonomy WLTP Urban (km/Mi)	452/280	Electronic Column Shift	S
Wheels and Tyres			
		Tyre Size	215/65R16C
		Wheel Tyre Steel	S
		Wheel Tyre Alloy	O
		Spare Wheel	Full Size (steel)

Basic Parameters

Weights		Dimensions	
GTW(kg)	4250	L*W*H(mm)	5364*2030*1990
GVW(kg)	3500	Wheel base(mm)	3366
CVW(kg)	2445	Ground Clearance(mm)	147
Maximum Front Axle Load(kg)	1830	Turning Radius(m)	6.7
Maximum Rear Axle Load(kg)	2050	Dimensions Cargo Area	
Payload(kg)	1055	Cargo Volume(m ³)	6.7
Maximum trailer capacity Braked(kg)	1500	Maximum Length(mm)	2913
Maximum trailer capacity Unbraked(kg)	750	Maximum Width(mm)	1800
		Maximum Width between wheelarches(mm)	1390
		Maximum Height(mm)	1328
		Dimensions Sliding Door	
		Width(mm)	990
		Height(mm)	1200

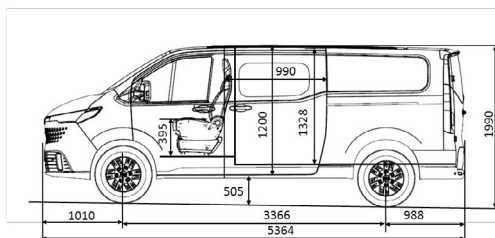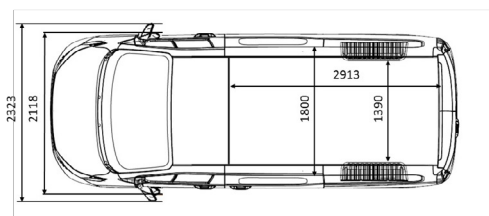





MAXUS eDELIVER 7 L2H1 88kWh

Basic Parameters

Battery & Electric Motor		Performance	
Battery Capacity(kWh)	88	Maximum Speed (kmh/mph)	90/55 (ECO) 120/75 (Normal, Power)
Max. Power(kW)	150	Acceleration 0-100kmh / 0-60mph	11.6/11.02
Max.Torque(N.m)	330	Max. Grade Ability	25%
Energy Consumption WLTP Combined (kWh/100km)	28.20	Suspension & Chassis	
Charging Time(AC charger 11kW, 5-100%)h	9.3h	Brake System	Front & Rear: Disc Brake
Charging Time (DC 20-80%) min (DC 90KW,150A)	43min	Suspension	Front: Macpherson Independent Suspension
Autonomy WLTP Combined (km/Mi)	362/225	EPB	S
Autonomy WLTP Urban (km/Mi)	524/325	Electronic Column Shift	S
Wheels and Tyres			
		Tyre Size	215/65R16C
		Wheel Tyre Steel	S
		Wheel Tyre Alloy	O
		Spare Wheel	Full Size (steel)

Basic Parameters

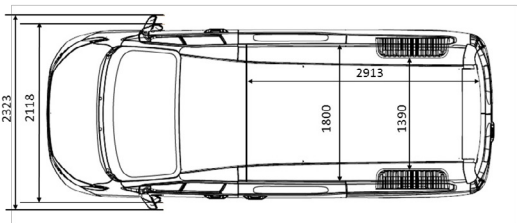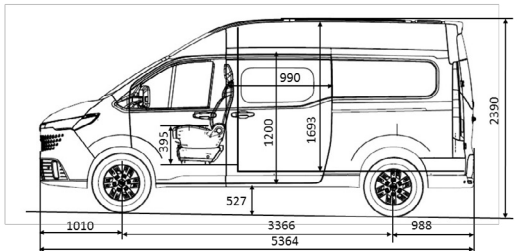Weights		Dimensions	
GTW(kg)	4250	L*W*H(mm)	5364*2030*2390
GVW(kg)	3500	Wheel base(mm)	3366
CVW(kg)	2475	Ground Clearance(mm)	167
Maximum Front Axle Load(kg)	1830	Turning Radius(m)	6.7
Maximum Rear Axle Load(kg)	2050	Dimensions Cargo Area	
Payload(kg)	1025	Cargo Volume(m ³)	8.7
Maximum trailer capacity Braked(kg)	1500	Maximum Length(mm)	2913
Maximum trailer capacity Unbraked(kg)	750	Maximum Width(mm)	1800
		Maximum Width between wheelarches(mm)	1390
		Maximum Height(mm)	1693
		Dimensions Sliding Door	
		Width(mm)	990
		Height(mm)	1200

Basic Parameters

Battery & Electric Motor		Performance	
Battery Capacity(kWh)	88	Maximum Speed (km/h, Mi/h)	90/55 (ECO) 120/75 (Normal, Power)
Max. Power(kW)	150	Acceleration 0-100km/h / 0-60Mi/h	11.9 / 11.3
Max.Torque(N.m)	330	Max. Grade Ability	25%
Energy Consumption WLTP Combined (kWh/100km)	30.50	Suspension & Chassis	
Charging Time(AC charger 11kW, 5-100%)h	9.3h	Brake System	Front & Rear: Disc Brake
Charging Time (DC 20-80%) min (DC 90KW,150A)	43min	Suspension	Front: Macpherson Independent Suspension
Autonomy WLTP Combined (km/Mi)	328/200	EPB	S
Autonomy WLTP Urban (km/Mi)	469/290	Electronic Column Shift	S
Wheels and Tyres			
		Tyre Size	215/75R16C
		Wheel Tyre Steel	S
		Wheel Tyre Alloy	O
		Spare Wheel	Full Size (steel)

Equipment

Safety, Security and Driver Assistance

Blind Spot Detection	S	Driver & Front Passenger Airbags	S
Lane Change Assist System	S	Driver & Front Passenger Side Airbags	S
Rear Cross Traffic Alert	S	Curtain Airbags	S
Door opening Warning	S	Front & Rear Parking Sensor	S
AEBS (Autonomous Emergency Braking System)	S	Reversing Camera	S
FCW (Front Collision Warning System)	S	360° Camera	S
Lane Departure Warning & Lane Keeping Assist System	S	E-CALL	S
Emergency Lane Keeping Assist System	S	Adjustable Overspeed Alarm	S
ACC with Stop&Go	S	Auto Door Lock	S
IHC(Intelligent Headlight Control)	S		
Speed Limit Sign Identification System	S		
Fatigue Driving Monitoring and Early Warning System	S		
Tyre Pressure Monitoring System	S		
ESP+EBA+HHC	S		

Equipment

Multimedia		Exterior	
Touch Screen 12.3inch	S	Automatic LED headlight	S
MP5+DAB Radio + Bluetooth	S	Daytime Running Lamp	S
Apple Carplay & Android Auto	S	Front fog lamps	S
USB input	1	Rear fog lamps	S
4 Speakers	S	Electric Heated Exterior Mirror	S
Comfort and Convenience		Heated Windshield	S
Drive Mode	Power/Normal/Eco	Body Colour	
Smart Key*2	S	COLOUR PACK WARM WHITE	FOC
One Touch Start	S	COLOUR PACK OBSIDIAN BLACK (Metallic)	O
Heated, Man-made-leather Multifunctional Steering Wheel	S	COLOUR PACK MICA BLUE (Metallic)	O
Automatic Front Wiper with Rain Sensor	S	COLOUR PACK GALAXY SILVER (Metallic)	O
Drive&Passenger Side Power Windows (one touch up&down)	S	COLOUR PACK OLIVE BROWN (Metallic)	O
12V front power outlet	S	METAL ASH GREY (Metallic)	O
Manual Air Conditioning	S		


Equipment

Interior		Others	
Height Adjustable Steering wheel	S	6m Charging cable (Mode 3, 11KW)	S
Black Seat Cover	S	EPTO(Max 5kW, High voltage)	S
Manually Driver Seat with Single Armrest, heated function, height-Adjustable, Silding, Reclining, Adjustable Lumbar support, cusion-adjustable	S	Rear Trailer Hitch Interface (With Controller + Connecting line)	S
2-seater Front Passenger Bench	S		
Single Front Passenger Seat	O		
Cargo Area			
B Column Full Steel Unglazed Partition	S		
Single Sliding door	S		
Dual sliding door	O		
Rear Wing Doors with 90°/180° Openging	S		
Tie Down Loops	6		
Power Side Step(Only kerbside) only avaialble In conjunction with Alloy Wheels	O		

OBSIDIAN BLACK



MICA BLUE

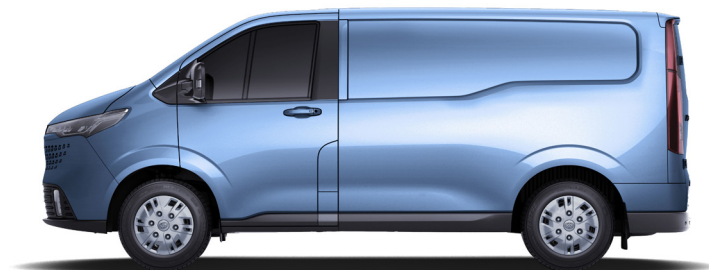


OLIVE BROWN



GALAXY SILVER



WARM WHITE

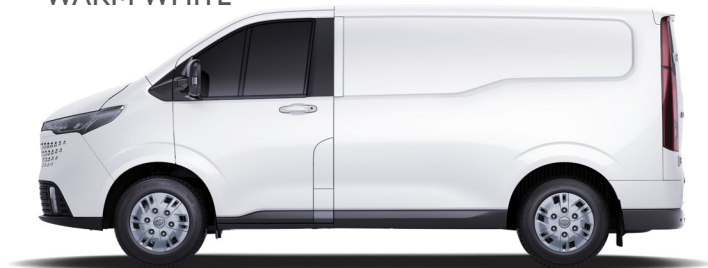

MAXUS eDELIVER 7 L1H1



OBSIDIAN BLACK



OLIVE BROWN




MICA BLUE



GALAXY SILVER



WARM WHITE

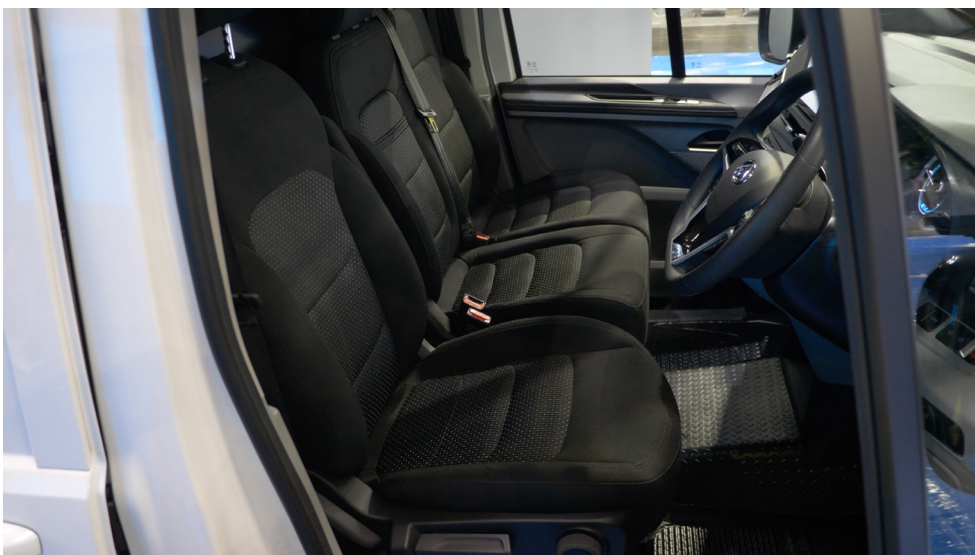

MAXUS eDELIVER 7 L2H2



OBSIDIAN BLACK



GALAXY SILVER



MICA BLUE



WARM WHITE



OLIVE BROWN



eDELIVER 9
100% ELECTRIC VEHICLE

MAXUS eDELIVER 9 VARIANTS

Specifications

MAXUS eDELIVER 9 N1 VARIANTS <3500kg	L2H2	L3H2	L3H2	L3H3	L3H3	L3H2 Crew Van	L3H3 Crew Van
	Capacity (kWh) 77kWh	Capacity (kWh) 77kWh	Capacity (kWh) 88kWh	Capacity (kWh) 77kWh	Capacity (kWh) 88kWh	Capacity (kWh) 77kWh	Capacity (kWh) 77kWh
Sliding door	Single/Double	Single/Double	Single/Double	Single/Double	Single/Double	Single/Double	Single/Double
Battery capacity(kWh)	77	77	88	77	88	77	77
Driving wheel	FWD	FWD	FWD	FWD	FWD	FWD	FWD
GVW(kg)	3500	3500	3500	3500	3500	3500	3500
CVW(kg)	2460/2680	2520/2540	2590/2610	2580/2600	2650/2670	2520/2540	2580/2600
Payload(kg)	1040/1020	980/960	910/890	920/900	850/830	980/960	920/900
GVW axle load: front/rear(kg)	1660/1840	1740/1760	1740/1760	1750/1750	1750/1750	1740/1760	1750/1750
Max axle load: front/rear(kg)	1885/2350	1885/2350	1885/2350	1885/2350	1885/2350	1885/2350	1885/2350
GTM (kg)	4250	4250	4250	4250	4250	4250	4250
Towing capacity (Braked/Unbraked) (kg)	1500/750	1500/750	1500/750	1500/750	1400/750	1500/750	1500/750
Rated power/Max power (kW)	75/150	75/150	75/150	75/150	75/150	75/150	75/150
Rated torque/Max torque (N.m)	170/330	170/330	170/330	170/330	170/330	170/330	170/330
Max speed(km/h)	100	100	100	100	100	100	100
Acceleration 0-50kmh/0-31mph (sec)	6.1	6.1	6	6.5	6.3	6.1	6.5
Acceleration 0-100kmh/0-62mph (sec)	18.3	18.3	16	19	16.5	18.3	19
Min turning diameter(m)	13.4±1	14.8±1	14.8±1	14.8±1	14.8±1	14.8±1	14.8±1
Approach angle/departure angle (CVW)	19.0/17.8	18.5/17.9	18.5/17.9	18.5/17.9	18.5/17.9	18.5/17.9	18.5/17.9
Approach angle/departure angle (GVW)	17.3/15.1	16.7/15.5	16.7/15.5	16.7/15.5	16.7/15.5	16.7/15.5	16.7/15.5
Dimensions: length*width*height(mm)	5546*2062*2515	5940*2062*2515	5940*2062*2515	5940*2062*2730	5940*2062*2730	5940*2062*2515	5940*2062*2730
Wheel base (mm)	3366	3760	3760	3760	3760	3760	3760
Cargo volume (m³)	9.7	11	11	12.3	12.3	7.1	7.8
Dimensions of cargo space: length*width*height(mm)	3019*1800*1802	3413*1800*1802	3413*1800*1802	3413×1800×2019	3413×1800×2019	3413*1800*1802	3413×1800×2019
Max width cargo space between wheel arches(mm)	1366	1366	1366	1366	1366	1366	1366
Slide door width(mm)	1269	1269	1269	1269	1269	1269	1269
Slide door height(mm)	1570	1570	1570	1570	1570	1570	1570
Ground clearance of the front axle (mm)	180	173	173	173	173	173	173
Ground clearance of the rear axle (mm)	223	228	228	228	228	228	228
Ground clearance between axles (mm)	196	190	190	190	190	190	190
AC Charging time (5%~100%) (h)/ Charging power (kW) 25°, Three-Phase"	8.5h/11kw 4.5h/22kw (Optional)	8.5h/11kw 4.5h/22kw (Optional)	9.3h/11kw 5.2h/22kw (Optional)	8.5h/11kw 5.2h/22kw (Optional)	9.3h/11kw 5.2h/22kw (Optional)	8.5h/11kw 4.5h/22kw (Optional)	8.5h/11kw 4.5h/22kw (Optional)
•	51min/78kw	51min/78kw	51min/90kw	51min/78kw	51min/90kw	51min/78kw	51min/78kw
Energy consumption WLTC combined (kWh/100km)*	29.4~31.0	29.4~31.0	30.0~31.9	30.4~32.1	30.9~32.9	29.4~31.0	30.4~32.1
Range WLTC combined (km/mi)*	285~300/177~186	285~300/177~186	320~340/199~211	275~290/170~180	310~330/193~205	285~300/177~186	275~290/170~180
Range WLTC city (km/mi)*	380~400/170~180	380~400/170~180	425~445/364~377	365~385/226~239	410~430/255~267	380~400/170~180	365~385/226~239
Tyre	215/75R16	215/75R16	215/75R16	215/75R16	215/75R16	215/75R16	215/75R16

*Estimated range & energy consumption under WLTC test standard. Actual range & energy consumption varies with conditions such as temperature, operation of air conditioner, driving mode, route conditions, battery age and loss of capacity.

MAXUS eDELIVER 9 VARIANTS

Specifications

MAXUS eDELIVER 9 N1 VARIANTS <3500kg	L2H2	L3H2	L3H2	L3H3	L3H3	L3H2 Crew Van	L3H3 Crew Van
	Capacity (kWh) 77kWh	Capacity (kWh) 77kWh	Capacity (kWh) 88kWh	Capacity (kWh) 77kWh	Capacity (kWh) 88kWh	Capacity (kWh) 77kWh	Capacity (kWh) 77kWh
Battery thermal management: liquid cooling & liquid heating	S	S	S	S	S	S	S
V2L exterior	S	S	S	S	S	S	S
V2L interior	O	O	O	O	O	O	O
11kw AC charger & EPTO (high voltage power take-off) *	S	S	S	S	S	S	S
22kw AC charger & DCDC (low voltage power take-off) *	O	O	O	O	O	O	O
Charging wire: Mode 3, Three-Phase	S	S	S	S	S	S	S
LED headlights	S	S	S	S	S	S	S
LED tail lights	S	S	S	S	S	S	S
Front & rear fog lights	S	S	S	S	S	S	S
Single sliding door	S	S	S	S	S	S	S
Dual sliding door	O	O	O	O	O	O	O
Rear wing doors with 180°hinges	S	-	-	-	-	-	-
Rear wing doors with 236°hinges	-	S	S	S	S	S	S
Alloy wheel 6.5Jx16	S	S	S	S	S	S	S
Power heated exterior mirrors	S	S	S	S	S	S	S
Power side step**	O	O	O	O	O	O	O
Roof rack mounting holes	-	S	S	-	-	S	-
Microfiber leather multifunctional steering wheel with heated steering wheel	S	S	S	S	S	S	S
Anti-glare interior mirror	S	S	S	S	S	S	S
Column-mounted shifter	S	S	S	S	S	S	S
Heated front seats	O	O	O	O	O	O	O
LED front reading light	S	S	S	S	S	S	S
Power front windows (one click up & down)	S	S	S	S	S	S	S

*When you choose 22kw AC charger & DCDC, EPTO is not available. EPTO is the high voltage power take-off, and its voltage range is about 260V~440V. DCDC is the low voltage power take-off, and its voltage is about 14V.

**When you choose Dual sliding door , Power side step can not be chosen.

***1 light for L2 models, 2 lights for L3 models

****The controller can not work until installing a connecting cable through after-sales

MAXUS eDELIVER 9 VARIANTS

Specifications

MAXUS eDELIVER 9 N1 VARIANTS <3500kg	L2H2	L3H2	L3H2	L3H3	L3H3	L3H2 Crew Van	L3H3 Crew Van
	Capacity (kWh) 77kWh	Capacity (kWh) 77kWh	Capacity (kWh) 88kWh	Capacity (kWh) 77kWh	Capacity (kWh) 88kWh	Capacity (kWh) 77kWh	Capacity (kWh) 77kWh
Automatic windshield wiper	S	S	S	S	S	S	S
LED cargo lights***	S	S	S	S	S	S	S
Automatic air conditioner	O	O	O	O	O	O	O
12.3" touch screen with MP5 & USB & Bluetooth & Carplay & Android Auto	S	S	S	S	S	S	S
4 speakers	S	S	S	S	S	S	S
DAB	S	S	S	S	S	S	S
Tyre pressure monitoring system	S	S	S	S	S	S	S
6 airbags (front,side,curtain) for driver & front passengers	S	S	S	S	S	S	S
ECall	S	S	S	S	S	S	S
Safety belt reminder	S	S	S	S	S	S	S
Rear view camera	S	S	S	S	S	S	S
360 camera	O	O	O	O	O	O	O
Front radar	S	S	S	S	S	S	S
Rear radar	S	S	S	S	S	S	S
ESP+EBA+HHC	S	S	S	S	S	S	S
EPB	S	S	S	S	S	S	S
Full-speed ACC	S	S	S	S	S	S	S
Automatic emergency braking system	S	S	S	S	S	S	S
Lane departure warning & lane keeping assist system	S	S	S	S	S	S	S
Blind spot detection & door-open warning system	S	S	S	S	S	S	S
Lane change assist	S	S	S	S	S	S	S
Speed limit information	S	S	S	S	S	S	S
Driver monitor system	S	S	S	S	S	S	S
Adjustable overspeed warning	S	S	S	S	S	S	S
Keyless start	S	S	S	S	S	S	S
2 smart keys	S	S	S	S	S	S	S
Rear trailer tow interface with controller****	S	S	S	S	S	S	S
Removable front tow hook	S	S	S	S	S	S	S

*When you choose 22kw AC charger & DCDC, EPTO is not available. EPTO is the high voltage power take-off, and its voltage range is about 260V~440V. DCDC is the low voltage power take-off, and its voltage is about 14V.

**When you choose Dual sliding door , Power side step can not be chosen.

***1 light for L2 models, 2 lights for L3 models

****The controller can not work until installing a connecting cable through after-sales

MAXUS eDELIVER 9 VARIANTS

Specifications

MAXUS eDELIVER 9 N1 VARIANTS <3500kg Chassis Cab	L3CC	L3CC	L4CC	L4CC
	77 kWh	88 kWh	77 kWh	88 kWh
DIMENSIONS & CAPACITIES				
Number of seats	3	3	3	3
Overall length (mm)	6200	6200	6680	6680
Overall width (mm)	2052	2052	2052	2052
Overall height (mm)	2310	2310	2310	2310
Wheel base (mm)	3760	3760	4048	4048
Maximum permissible length (mm)	6529	6529	6835	6835
Maximum permissible width (mm)	2136	2136	2136	2136
Maximum permissible height (mm)	2960	2960	2960	2960
Ground clearance of the front axle (mm)	183	183	169	169
Ground clearance of the rear axle (mm)	238	238	246	246
Ground clearance between axles (mm)	200	200	187	187
WEIGHTS & PAYLOAD				
GVW(kg)	3500	3500	3500	3500
CVW(kg)	2155	2215	2165	2225
Payload:GVW-CVW(kg)	1345	1285	1335	1275
GVW axle load: front/rear(kg)	1660~1740/1840~1760	1685~1740/1815~1760	1715~1775/1785~1725	1735~1800/1765~1700
Max axle load: front/rear(kg)	1885/2350	1885/2350	1885/2350	1885/2350
GTM (kg)	4250	4250	4250	4250
Towing capacity (Braked/Unbraked) (kg)	1500/750	1500/750	1500/750	1500/750
BATTERY & CHARGING				
Battery capacity(kWh)	77	88	77	88
Range WLTP combined (km/mi)*	189~288/118~179	214~339/133~211	187~287/116~178	211~334/131~208
Range WLTP city (km/mi)*	291~403/181~250	366~483/227~300	290~402/180~250	364~480/226~298
Energy consumption WLTP combined (kWh/100km/62mi)*	29.6~43.5	29.0~42.7	29.7~43.7	29.4~43.0
AC Charging time (5%~100%) (h)/Charging power (kW) Three-Phase	8.5h/11kw(S) 4.5h/22kw(O)	9.3h/11kw(S) 5.2h/22kw(O)	8.5h/11kw(S) 4.5h/22kw(O)	9.3h/11kw(S) 5.2h/22kw(O)
DC Charging time (10%~80%) (h)/Charging power (kw)	51min/78kw	51min/90kw	51min/78kw	51min/90kw
Battery thermal management: liquid cooling & liquid heating	S	S	S	S
11kw AC charger & EPTO(high voltage power take-off)**	S	S	S	S
22kw AC charger & DCDC(low voltage power take-off)**	O	O	O	O
Charging wire: Mode 3, Three-Phase	S	S	S	S
V2L exterior	S	S	S	S

MAXUS eDELIVER 9 VARIANTS

Specifications

MAXUS eDELIVER 9 N1 VARIANTS <3500kg Chassis Cab	L3CC	L3CC	L4CC	L4CC
	77 kWh	88 kWh	77 kWh	88 kWh
POWER & DRIVING				
Driving wheel	FWD	FWD	FWD	FWD
Rated power/Max power (kW)	75/150	75/150	75/150	75/150
Rated torque/Max torque (N.m)	170/330	170/330	170/330	170/330
Max speed(kmh/mph)	100/62	100/62	100/62	100/62
Min turning diameter(m)	14.8±1	14.8±1	15.8±1	15.8±1
Approach angle/departure angle (CVW) (°)	17.9/17.2	17.9/17.2	17.8/15.2	17.8/15.2
Approach angle/departure angle (GVW) (°)	17.3/13.1	17.3/13.1	16.4/12.2	16.4/12.2
Tyre	215/75R16	215/75R16	215/75R16	215/75R16
EXTERIOR				
LED headlights	S	S	S	S
Front & rear fog lights	S	S	S	S
Alloy wheel 6.5Jx16	O	O	O	O
Power heated exterior mirrors	S	S	S	S
Removable front tow hook	S	S	S	S
Rear trailer tow interface	S	S	S	S
INTERIOR & COMFORT				
Microfiber leather multifunctional steering wheel with heated steering wheel	S	S	S	S
Anti-glare interior mirror	S	S	S	S
Column-mounted shifter	S	S	S	S
Heated front seats	O	O	O	O
LED front reading light	S	S	S	S
Power front windows (one click up & down)	S	S	S	S
Automatic windshield wiper	S	S	S	S
Automatic air conditioner	O	O	O	O
12.3" touch screen with MP5 & USB & Bluetooth & Carplay & Android Auto	S	S	S	S
4 speakers	S	S	S	S
DAB	S	S	S	S
Keyless start	S	S	S	S
2 smart keys	S	S	S	S

MAXUS eDELIVER 9 N1 VARIANTS <3500kg Chassis Cab	L3CC	L3CC	L4CC	L4CC
	77 kWh	88 kWh	77 kWh	88 kWh
SAFETY & SECURITY				
Tyre pressure monitoring system	S	S	S	S
6 airbags (front,side,curtain) for driver & front passengers	S	S	S	S
ECall	S	S	S	S
Safety belt reminder	S	S	S	S
Front radar	S	S	S	S
Driver Assistance				
ESP+EBA+HHC	S	S	S	S
EPB	S	S	S	S
Full-speed ACC	S	S	S	S
Automatic emergency braking system	S	S	S	S
Lane departure warning & lane keeping assist system	S	S	S	S
Speed limit information	S	S	S	S
Driver monitor system	S	S	S	S
Adjustable overspeed warning	S	S	S	S

*Estimated range & energy consumption under EU WLTP test standard. Actual range & energy consumption varies with conditions such as size&shape of cargo box, temperature, operation of air conditioner, driving mode, route conditions, battery capacity loss and loading mass. When installing a tall cargo box, it is advisable to install a shroud to reduce wind resistance.

**When you choose 22kw AC charger & DCDC, EPTO is not available. The available power of DCDC is 2.5kw. The peak power of EPTO is 5kw.

MAXUS eDELIVER 9 VARIANTS

Specifications

MAXUS eDELIVER 9 N2 VARIANTS 4250kg	L3H2	L3H3
	Capacity (kWh) 88kWh	Capacity (kWh) 88kWh
DIMENSIONS & CAPACITIES		
Number of seats	3	3
Sliding door	Single	Single
Rear Wheels	Single	Single
Overall length (mm)	5940	5940
Overall width (mm)	2062	2062
Overall height (mm)	2555	2770
Wheel base (mm)	3760	3760
Cargo volume (m³)	11	12.3
Loadspace length (mm)	3413	3413
Loadspace width (mm)	1800	1800
Loadspace height (mm)	1802	2019
Max loadspace width between wheel arches(mm)	1366	1366
Slide door width(mm)	1269	1269
Slide door height(mm)	1570	1570
Ground clearance of the front axle (mm)	179	178
Ground clearance of the rear axle (mm)	145	144
Ground clearance between axles (mm)	145	144
WEIGHTS & PAYLOAD		
GVW(kg)	4250	4250
CVW(kg)	2720	2780
Payload:GVW-CVW(kg)	1530	1470
GVW axle load: front/rear(kg)	1750/2500	1760/2490
Max axle load: front/rear(kg)	1950/2760	1950/2760
GTM (kg)	5000	5000
Towing capacity (Braked/Unbraked) (kg)	2000/750	2000/750

MAXUS eDELIVER 9 VARIANTS

Specifications

MAXUS eDELIVER 9 N2 VARIANTS 4250kg	L3H2	L3H3
	Capacity (kWh) 88kWh	Capacity (kWh) 88kWh
BATTERY & CHARGING		
Battery capacity(kWh)	88	88
Range WLTP combined (km/mi)*	300~330/186~205	288~318/179~198
Range WLTP city (km/mi)*	381~419/237~260	369~407/229~253
Energy consumption WLTP combined (kWh/100km)*	29.1~32.0	30.6~33.7
AC Charging time (5%~100%) (h)/Charging power (kW) Three-Phase	9.3h/11kw(S) 5.2h/22kw(O)	9.3h/11kw(S) 5.2h/22kw(O)
DC Charging time (10%~80%) (h)/Charging power (kw)	51min/90kw	51min/90kw
Battery thermal management□liquid cooling & liquid heating	S	S
11kw AC charger & EPTO(high voltage power take-off)**	S	S
22kw AC charger & DCDC(low voltage power take-off)**	O	O
Charging wire: Mode 3, Three-Phase	S	S
V2L exterior	S	S
V2L interior	O	O
POWER & DRIVING		
Driving wheel	RWD	RWD
Rated power/ Max power (kW)	70/170	70/170
Rated torque/ Max torque(N.m)	170/330	170/330
Max speed(kmh/mph)	90/56	90/56
Acceleration 0-50kmh/ 0-31mph(sec)	6.5	7.0
Acceleration 0-100kmh/ 0-62mph(sec)	21	22
Min turning diameter(m)	14.1±1	14.1±1
Approach angle/departure angle (CVW) (°)	19.6/20.4	19.5/20.3
Approach angle/departure angle (GVW) (°)	17.1/14.7	17.0/14.6
Tyre	235/65R16	235/65R16
EXTERIOR		
LED headlights	S	S
LED tail lights	S	S
Front & rear fog lights	S	S
Single sliding door	S	S
Rear wing doors with 236°hinges	S	S
Alloy wheel 6.5Jx16	O	O
Power heated exterior mirrors	S	S
Power side step	O	O
Roof rack mounting points	S	-
Removable front tow hook	S	S
Rear trailer tow interface with controller***	S	S

MAXUS eDELIVER 9 N2 VARIANTS 4250kg	L3H2	L3H3
	Capacity (kWh) 88kWh	Capacity (kWh) 88kWh
INTERIOR & COMFORT		
Microfiber leather multifunctional steering wheel with heated steering wheel	S	S
Anti-glare interior mirror	S	S
Column-mounted shifter	S	S
Heated front seats	O	O
LED front reading light	S	S
Power front windows (one click up & down)	S	S
Automatic windshield wiper	S	S
LED cargo lights	S	S
Automatic air conditioner	O	O
12.3" touch screen with MP5 & USB & Bluetooth & Carplay & Android Auto	S	S
4 speakers	S	S
DAB	S	S
Keyless start	S	S
2 smart keys	S	S
SAFETY & SECURITY		
Tyre pressure monitoring system	S	S
6 airbags (front,side,curtain) for driver & front passengers	S	S
Safety belt reminder	S	S
Rear view camera	S	S
360 camera	O	O
Front radar	S	S
Rear radar	S	S
DRIVER ASSISTANCE		
ESP+EBA+HHC	S	S
EPB	S	S
Full-speed ACC	S	S
Automatic emergency braking system	S	S
Lane departure warning & lane keeping assist system	S	S
Blind spot detection & door-open warning system & blind spot information system & moving off information system	S	S
Lane change assist	S	S
Speed limit information	S	S
Driver monitor system	S	S
Adjustable overspeed warning	S	S

*Estimated range & energy consumption under EU WLTP test standard. Actual range & energy consumption varies with conditions such as temperature, operation of air conditioner, driving mode, route conditions, battery capacity loss and loading mass.

**When you choose 22kw AC charger & DCDC, EPTO is not available. The available power of DCDC is 2.5kw. The peak power of EPTO is 5kw.

***You need to buy and install connecting cables through after-sales to make the interface & controller work.

MAXUS eDELIVER 9 N2 VARIANTS 4250kg Chassis Cab	L3H1CC
	Capacity (kWh) 88kWh
DIMENSIONS & CAPACITIES	
Number of seats	3
Rear Wheels	Single
Overall length (mm)	6200
Overall width (mm)	2052
Overall height (mm)	2310
Wheel base (mm)	3760
Maximum permissible length (mm)	6452
Maximum permissible width (mm)	2136
Maximum permissible height (mm)	2960
Ground clearance of the front axle (mm)	214
Ground clearance of the rear axle (mm)	142
Ground clearance between axles (mm)	142
WEIGHTS & PAYLOAD	
GVW(kg)	4250
CVW(kg)	2310
Payload: GVW-CVW(kg)	1940
GVW axle load: front/rear(kg)	1500~1555/2695~2750
Max axle load: front/rear(kg)	1950/2760
GTM (kg)	5000
Towing capacity (Braked/Unbraked) (kg)	2000/750
BATTERY & CHARGING	
Battery capacity(kWh)	88
Range WLTP combined (km/mi)*	198~286/123~178
Range WLTP city (km/mi)*	294~409/183~254
Energy consumption WLTP combined (kWh/100km/62mi)*	33.0~45.4
AC Charging time (5%~100%) (h)/Charging power (kW) Three-Phase	9.3h/11kw(S) 5.2h/22kw(O)
DC Charging time (10%~80%) (h)/Charging power (kw)	51min/90kw
Battery thermal management□liquid cooling & liquid heating	S
11kw AC charger & EPTO(high voltage power take-off)**	S
22kw AC charger & DCDC(low voltage power take-off)**	O
Charging wire: Mode 3, Three-Phase	S
V2L exterior	S


MAXUS eDELIVER 9 VARIANTS

Specifications

POWER & DRIVING		SAFETY & SECURITY	
Driving wheel	RWD	Tyre pressure monitoring system	S
Rated power/ Max power (kW)	70/170	6 airbags (front,side,curtain) for driver & front passengers	S
Rated torque/Max torque(N.m)	170/330	Safety belt reminder	S
Max speed(kmh/mph)	90/56	Front radar	S
Min turning diameter(m)	14.1±1	Driver Assistance	
Approach angle/departure angle (CVW) (°)	19.6/20.4	ESP+EBA+HHC	S
Approach angle/departure angle (GVW) (°)	17.1/14.7	EPB	S
Tyre	235/65R16	Full-speed ACC	S
EXTERIOR		Automatic emergency braking system	S
LED headlights	S	Lane departure warning & lane keeping assist system	S
Front & rear fog lights	S	Blind spot information system & moving off information system	S
Alloy wheel 6.5Jx16	O	Speed limit information	S
Power heated exterior mirrors	S	Driver monitor system	S
Removable front tow hook	S	Adjustable overspeed warning	S
Rear trailer tow interface	S		
Interior & Comfort			
Microfiber leather multifunctional steering wheel with heated steering wheel	S		
Anti-glare interior mirror	S		
Column-mounted shifter	S		
Heated front seats	O		
LED front reading light	S		
Power front windows (one click up & down)	S		
Automatic windshield wiper	S		
Automatic air conditioner	O		
12.3" touch screen with MP5 & USB & Bluetooth & Carplay & Android Auto	S		
4 speakers	S		
DAB	S		
Keyless start	S		
2 smart keys	S		

*Estimated range & energy consumption under EU WLTP test standard. Actual range & energy consumption varies with conditions such as size&shape of cargo box, temperature, operation of air conditioner, driving mode, route conditions, battery capacity loss and loading mass. When installing a tall cargo box, it is advisable to install a shroud to reduce wind resistance.

**When you choose 22kw AC charger & DCDC, EPTO is not available. The available power of DCDC is 2.5kw. The peak power of EPTO is 5kw.

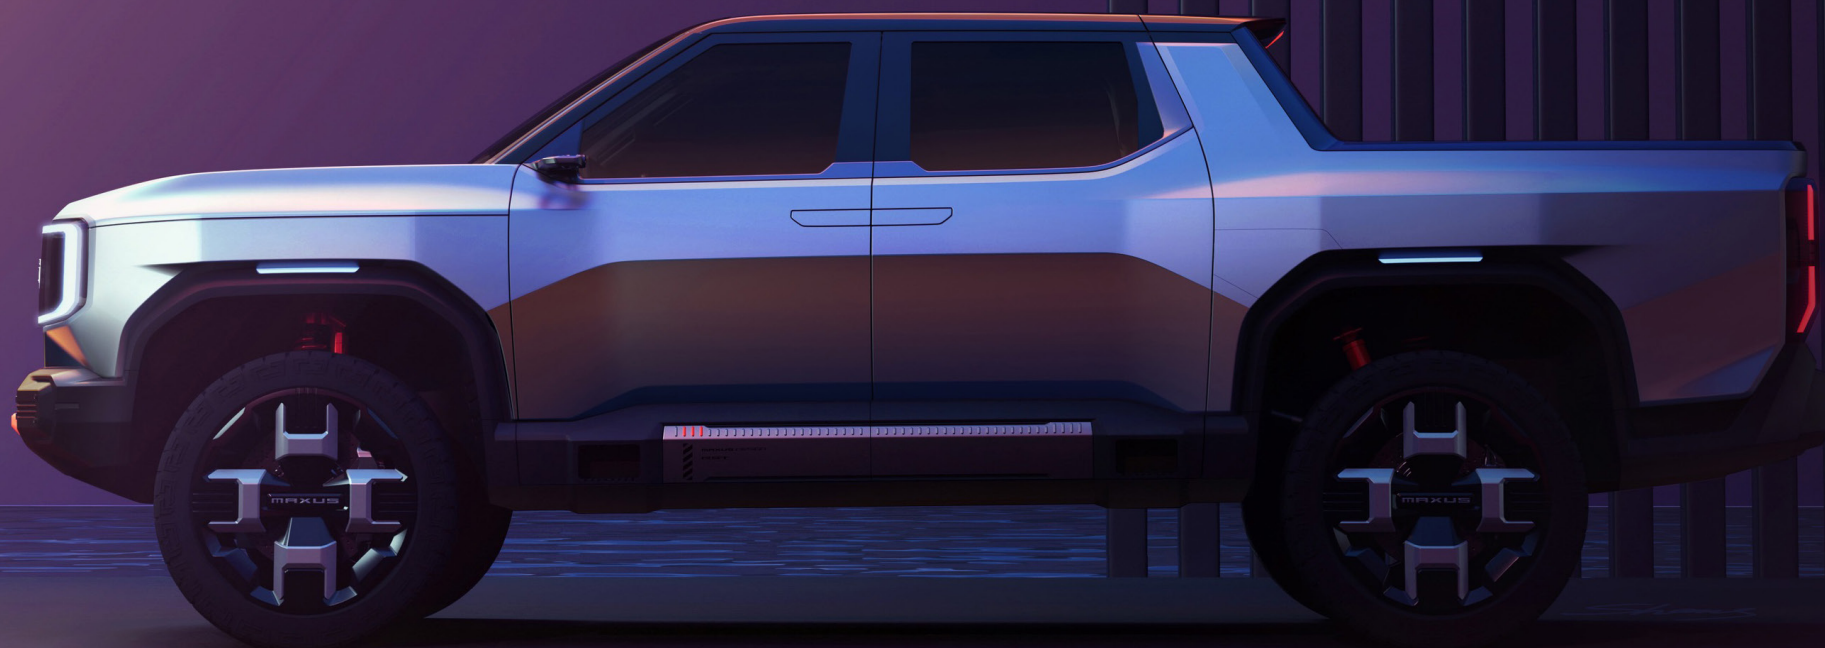

Specification of eTERRON 9

MAXUS eTERRON 9





saicmaxus.co.uk | saicmaxus.ie

MAXUS eTERRON 9 ELECTRIC PICKUP

Dimensions & Capacities	
Length/Width/Height(mm)	5500*1997*1860/1874(with roof rails)
Cargo Box (mm)	1561×1500×535
Wheelbase (mm)	3300
Approach Angle/Departure Angle (CVW) (°)	29/25
Ramp Angle(°)	20
Ground Clearance Of The Front Axle (mm)	230
Ground Clearance Of The Rear Axle (mm)	237
Ground Clearance Between Axles (mm)	260
Wading Depth(mm)	550
Weights & Payload	
GTM(kg)	6500
GVW(kg)	3500
CVW(kg)	2880
Payload(kg)	620
Towing Capacity (Braked/Unbraked) (kg)	3500/750

DELIVERY CHARGE £650 ON ALL NEW MAXUS PRODUCTS TO DEALER.

All prices are subject to Vat and RFL and Reg fee at current rate. OZEV Van - Plug - in -Grant can be applied for at current rate.

• :Standard ° :Optional



saicmaxus.co.uk | saicmaxus.ie

MAXUS eTERRON 9 ELECTRIC PICKUP

	Luxury	Premium
Electric		
Battery Capacity(kwh)	102.2	102.2
Range WLTC Combined (km)*	430	430
Energy Consumption WLTC Combined (kWh/100km)*	26.7	26.7
AC Charging Time (5%~100%) (h)/Charging power (kW), Three-Phase,25°C	12h/11kw	12h/11kw
DC Charging Time (20%~80%) (mins)/Charging Power (kW),25°C	42mins/115kw	42mins/115kw
Battery Thermal Management: Liquid Cooling & Liquid Heating	•	•
V2L Interior (Front Trunk+ Rear Cargo Container)	•	•
V2L Exterior	•	•
Charging Wire: Mode 3, Three-Phase	•	•
Power & Driving		
Driving Wheel	4WD	4WD
Max Power:Front/Rear (kW)	125/200	125/200
Max Torque: Front/Rear (N.m)	250/450	250/450
Max.Speed (km/h)	190	190
Acceleration 0-50km/h (sec)	3	3
Acceleration 0-100km/h (sec)	5	5
Min Turning Diameter (m)	13.3	13.3



saicmaxus.co.uk | saicmaxus.ie

MAXUS eTERRON 9 ELECTRIC PICKUP

	Luxury	Premium
Suspension and Brakes		
Suspension (Front/Rear)	• Air Independent Suspension/Air Independent Suspension ° Double Wishbone Suspension/Double Wishbone Suspension	• Air Independent Suspension/Air Independent Suspension
Disc Brakes In Front & Rear	•	•
Safety		
360-Degree Camera	•	•
Rear Parking Sensor	•	•
Front Parking Sensor	•	•
ACC (Adaptive Cruise Control)	•	•
ICA (Integrated Cruise Assist)	•	•
FCW (Forward Collision Warning)	•	•
AEB (Automatic Emergency Braking)	•	•
LKA (Lane Keep Assist)	•	•
LDW (Lane Departure Warning)	•	•
ELK (Emergent Lane Keeping)	•	•
SLIF (Speed Limit Information Function)	•	•
ISA (Intelligent Speed Limit Assistance)	•	•
IHC (Intelligent High beam Control)	•	•



saicmaxus.co.uk | saicmaxus.ie

MAXUS eTERRON 9 ELECTRIC PICKUP

	Luxury	Premium
Safety		
Blind Spot Assist	•	•
RCTA (Rear Cross Traffic Alert)	•	•
LCA(Lane Change Assist System)	•	•
RCW (Rear Collision Warning System)	•	•
DOW (Door Open Warning)	•	•
ESP+EBA(HAS, RMI, HDC)	•	•
ATS(All Terrain Mode)	•	•
TPMS	•	•
Driver Airbag	•	•
Front Passenger Airbag	•	•
Driver and Front Passenger Side Airbags	•	•
Front to rear curtain airbags	•	•
Far Side Airbag	•	•
Seatbelts Reminder System (All Seats)	•	•
3-point Seatbelts for All Passenger	•	•
EPB+Auto Hold	•	•
Rear Window Electric Heating Defrosting	•	•
PEPS	•	•



saicmaxus.co.uk | saicmaxus.ie

MAXUS eTERRON 9 ELECTRIC PICKUP

	Luxury	Premium
Entertainment		
Dual Screen (12.3" cluster+12.3" central touch screen)	•	•
Maxus Connected Service	•	•
Vehicle Remote Control	•	•
Voice Control*	•	•
Navigation System*	•	•
Online Music*	•	•
Fatigue Driving Early Warning System	•	•
Vehicle Bluetooth	•	•
Carplay & Android Auto	•	•
Digital Radio Reception (DAB)	•	•
USB Ports	2-Type-A+2-Type-C	2-Type-A+2-Type-C
Mobile Phone Wireless Charging	•	•
Speaker	6 Speakers	8 Speakers



saicmaxus.co.uk | saicmaxus.ie

MAXUS eTERRON 9 ELECTRIC PICKUP

	Luxury	Premium
Interior & Comfort		
Interior Style	Black	White
Air conditioning – Auto	•	•
Heated ,Microfiber Leather Multifunctional Steering Wheel	•	•
Driver Seat	• Electrical 6-Way	• Electrical 8-Way+4-Direct Electric Power Lumbar Support
Front Passenger Seat	• Electrical 6-Way	• Electrical 6-Way
Seat Material	• PVC	• Leather
Front electric Heated Seats	•	•
Rear electric Heated Seats	•	•
Ventilated Seats -Front Driver	-	•
Massaging Seats -Front Driver	-	•
Front Driver Memory +Rear View Mirror Memory	-	•
Panoramic Sunroof	-	•
Rear Air Conditioner Outlet (Armrest Position)	•	•
Windows-All Power With One Touch Up And Down	•	•
Automatic Headlight	•	•
Auto Wiper	•	•
Electronic Power Steering System	•	•
Streaming Rearview Mirror	•	•
Passanger Aear Lamp(LED)	-	•
2 Smart Keys	•	•



saicmaxus.co.uk | saicmaxus.ie

MAXUS eTERRON 9 ELECTRIC PICKUP

	Luxury	Premium
Exterior		
Tyre Type	• 275/55R20HT	• 275/55R20HT
Spare Tire	• Full size	• Full size
LED Headlight	•	•
LED Daytime Running Light	•	•
High-Mounted Stop Light	•	•
LED Through Type Rear Light	•	•
Front Trunk	•	•
Electric Support Rod For Front Trunk	•	•
Electric Heating Outside Rearview Mirror With Folding	•	•
Plastic Bed Liner	•	•
Cargo Slide Rail	•	•
Cargo Lighting X2	•	•
Rear Trailer Tow Interface With Controller	•	•
Tow Bar(Include Rear Trailer Hitch Interface+Power Interface+Trailer Hitch)	•	•
Spoke Kit	-	•
Side Step	•	•
Tailgate With Lift Assistance	•	•
Roof Rails	-	•



saicmaxus.co.uk | saicmaxus.ie

MAXUS eTERRON 9 ELECTRIC PICKUP

	Luxury	Premium
Exterior		
Body Colour (Metallic Paint at £575+ VAT)	◦ Metal Black ◦ Pearl Lustre White ◦ Desert Yellow ◦ Concrete Grey	◦ Metal Black ◦ Pearl Lustre White ◦ Desert Yellow ◦ Concrete Grey
Warranty		
5 YEARS/160,000km (Whole vehicle)	•	•
8 YEARS/200,000km (Battery)	•	•